

上海韵昕机械设备有限公司
Shanghai Yunxin Machinery

联系电话： +86 135 0194 9948 **王东梅**
+86 158 0055 0122 **王 浩**

机床防护罩、软管及接头

Cover, Hose, Connector
for Tooling & Welding Machines



上海韵昕机械设备有限公司
Shanghai Yunxin Machinery Co., Ltd

CONTENTS



01
关于我们
About us

02
防护罩系列
Protective cover

08
保护管系列
Protective cover

10
防爆管系列
Protective cover

11
接头系列
Connector

ABOUT US
关于我们

上海韵昕机械设备有限公司深耕机械行业二十余年，专注于机床及工业设备、导轨、丝杠等精密部件的高品质防护产品。

拥有专业的设计与制造实力，支持按图定制。

Shanghai Yunxin Machinery Equipment Co., Ltd. has been deeply engaged in the machinery industry for more than 20 years, specializing in high-quality protection products for precision components such as machine tools, industrial equipment, guide rails and lead screws.

We have professional design and manufacturing capabilities and support custom manufacturing according to drawings.

核心产品 Core products

精密防护类产品：

防护罩系列： 风琴式防护罩、盔甲式防护罩、金属制防护罩、刮屑板、丝杠保护罩、油缸、气缸耳环保护罩。
自动伸缩防护带（卷帘）、软连接。

电气配线、配管保护：

软管系列： 尼龙软管、镀锌金属软管、无PVC金属软管、外编织金属软管。

紧固接头：拧紧接头、快速安装接头、防水盒接头等。

Precision Protective Products:
Protective Cover Series: Bellows protective cover, armor-type protective cover, metal protective cover, chip deflector, lead screw protective cover, hydraulic cylinder, pneumatic cylinder ear protector.
Automatic retractable safety belt (curtain type), flexible connection.
Electrical wiring and piping protection:
Hose Series: Nylon Hose, Galvanized Metal Hose, PVC-Free Metal Hose, Braided Metal Hose.
Fastening joints: screw joints, quick-installation joints, waterproof box joints, etc.

商标注册证 Trademark Registration Certificate




风琴式防护罩 Bellows Covers

依据**线轨、硬轨**不同规格设计制作。此外，导轨长度或行程，需求的展开长度和收缩长度及工作环境等都是必不可少的考量要素。


以上防护产品可做单根导轨或双根导轨整体防护(可覆盖丝杠) 等其它物料。

Designed and manufactured according to different specifications of linear guide rails and hardened guide rails. In addition, the guide rail length or stroke, required extended length and compressed length, as well as the working environment are all essential consideration factors.

The above protective products can be used for single or double rail integral protection (covering the lead screw) and other materials.

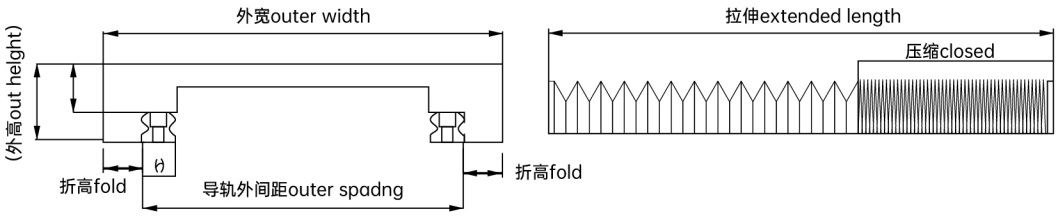


双导轨防护示意

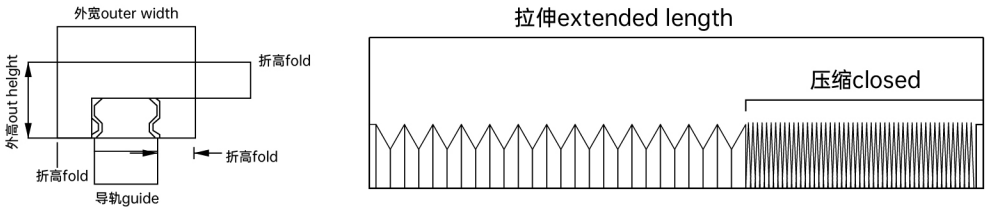

单导轨防护示意

对于**圆形导轨**而言，内部依导轨圆周形状做PVC支撑，外型和普通矩形风琴防护罩一样。此类圆轨规格从Ø12-50mm左右。

For round guide rails, internal PVC supports are made according to the circumferential shape of the guide rails, and the appearance is the same as that of ordinary rectangular bellows covers. The specifications of such round rail covers range from approximately Ø12mm to Ø50mm.

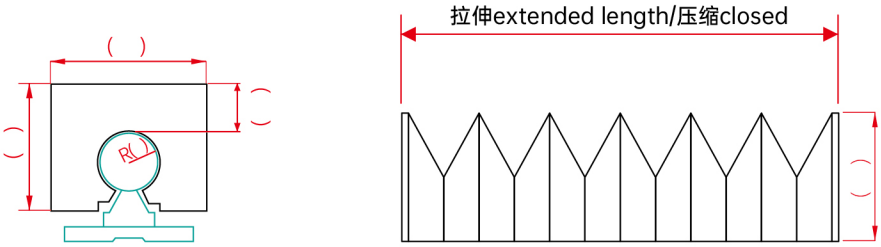

燕尾类导轨防护制品，是非标中的非标，其角度及对应参数尤为重要。这类导轨防护以钢板防护居多，或刮屑板（请见P7）。

对用于热切的焊接类设备，除上述情况外，特别需要考虑温度条件，我们可提供阻燃材料；耐高温防火材料，瞬间温度可达到300°C-700°C。


Protection products for dovetail guide rails are ultra-customized items, and their angles and corresponding parameters are particularly important. Most of these guide rail protections are steel plate guards or wiper plates (see Page 7).


For hot-cutting welding equipment, in addition to the above conditions, temperature conditions need special consideration. We can provide flame-retardant materials and high-temperature fire-resistant materials, which can withstand instantaneous temperatures of 300°C to 700°C.

每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。
All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.

方型风琴防护罩 Square Bellows Covers

多用于升降工况条件中。
Mostly used in lifting working conditions.

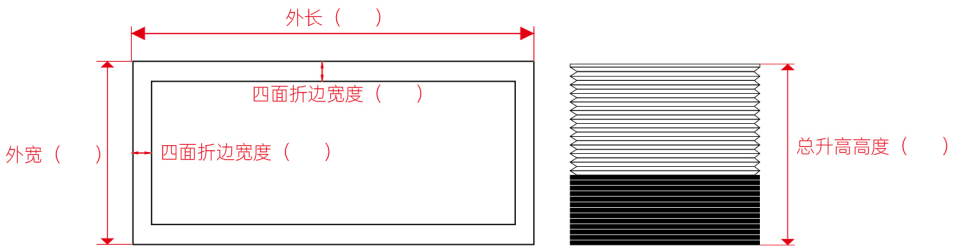


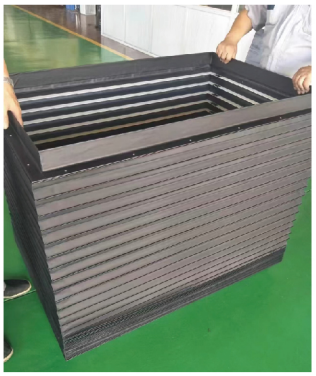



盔甲式防护罩 Armored Bellows Covers

借用金属卡扣将不锈钢片嵌入风琴式防护罩上，通常每个折片上加一片不锈钢片，若空间较小状态下，可调整不锈钢片宽度，或隔2-3个折片添加不锈钢片处理。

Use metal buckles to embed stainless steel sheets into the accordion style protective cover. Usually, one stainless steel sheet is added to each fold. If the space is small, the width of the stainless steel sheet can be adjusted, or stainless steel sheets can be added every 2-3 folds.

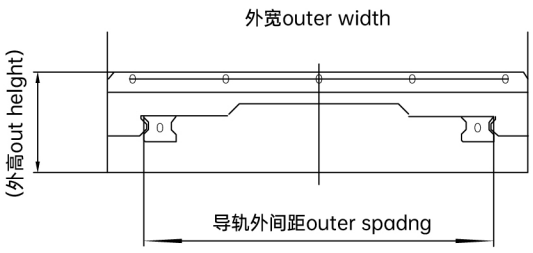



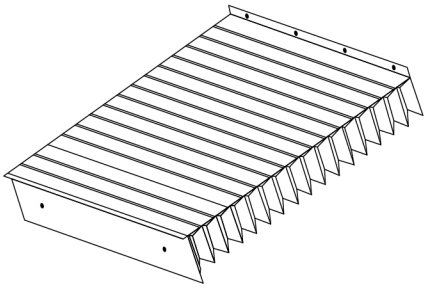

在无冷却液工作状态下，这类防护制品表面耐热温度瞬间可达900°C左右。和普通风琴护罩一样，亦可做单导轨防护或双导轨（丝杠）防护。


In working conditions without coolant, the surface of these protection products can withstand instantaneous temperatures of approximately 900°C. Like ordinary bellows covers, they can also provide protection for single guide rails or double guide rails (lead screws).

每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。
All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.

壁挂式防护罩 Wall-Mounted Guards

是一种复合型防护罩，有风琴和盔甲等制式，此类防护产品同样具备清理油/水/屑的作用，可最大限度节省占用空间。运行速度快，可达48M/MIN左右，同时极具美感，可充份提升设备整体使用及观赏价值。


It is a composite protective cover with organ and armor formats. This type of protective product also has the function of cleaning oil/water/debris, which can maximize space saving. The running speed is fast, reaching around 48M/MIN, and it is also aesthetically pleasing, which can fully enhance the overall use and viewing value of the equipment.

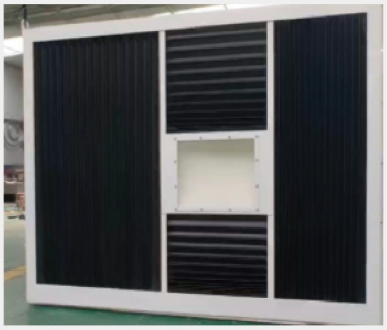

壁挂式风琴单头防护罩
Wall-Mounted Single-Head Bellows Covers



壁挂式风琴双头防护罩
Wall-Mounted Double-Head Bellows Covers

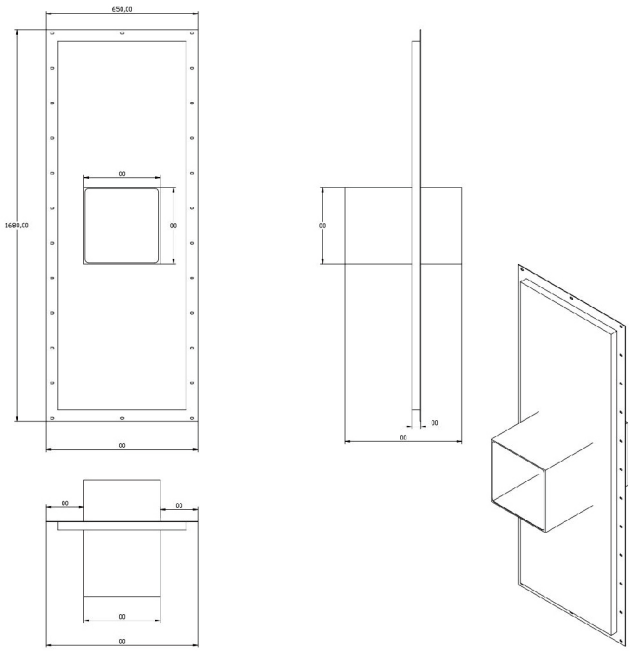



壁挂式盔甲防护罩，具有三防布和不锈钢片双重保护，防水、防油、防屑效果更佳，外形更美观。
此类产品可替代钢板防护罩，多用于卧加主轴的防护。

Wall-mounted armored bellows guards have dual protection of three-proof fabric and stainless steel sheets, providing better waterproof, oil-proof and chip-proof effects with a more beautiful appearance.

These products can replace steel plate guards and are mostly used for protecting the spindles of horizontal machining centers.

每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。
All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.

丝杠防护罩 Lead Screw Covers




此类产品为手工制作，常用于丝杠/光杆保护，同样适用于油、气缸耳环保护，升降杆保护以及相似状态下精密部件的保护。

通常，是由布料 + 不锈钢内支撑圈+法兰组合而成。

This type of product is handcrafted and commonly used for screw/rod protection, as well as suitable for oil and cylinder ear protection, lifting rod protection, and the safeguarding of precision components under similar conditions.

Typically, it consists of fabric + stainless steel inner support ring + flange assembly.

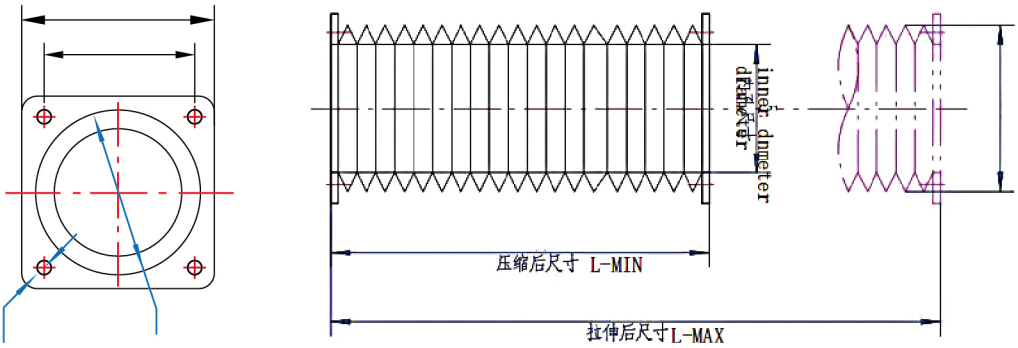


很多情况下，在设备组装完成后根据需求现场临时增加这部分防护时，可选用缝制类产品，如加拉链、粘合贴，或直接剖开制式产品，非常方便安装，可快速、高效地解决拆卸难的问题。又因其无需加内支撑，可达到很小的压缩值，对于小空间需求很适合。

In many cases, when this protective component needs to be added on-site after equipment assembly based on requirements, stitched products such as zippers or adhesive tapes can be used. Alternatively, standardized products can be directly cut open, making installation extremely convenient. This approach quickly and efficiently resolves the issue of difficult disassembly. Additionally, since no internal support is required, it achieves minimal compression, making it ideal for spaces with limited dimensions.



拉链式

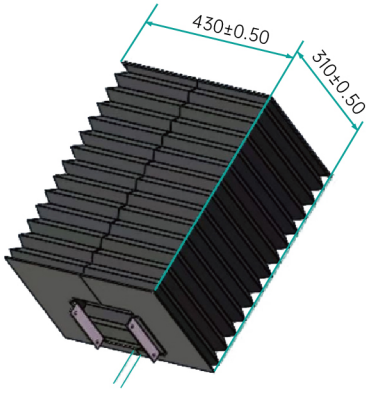

开口式



耐高温银灰色

在传统效用防尘、防水、防屑、防油之外，通过材料种类的提升，已增加耐高温性能材料制品，起到防火阻燃效果，也可用于热切加工中废气及烟雾的处理。目前可用材料瞬间耐高温可达350°C左右，有黑色和银灰色二种。

In addition to the traditional functions of dustproof, waterproof, chip-proof and oil-proof, products made of high-temperature resistant materials have been developed through material upgrades, providing fire and flame retardant effects. They can also be used for the treatment of waste gas and smoke in hot-cutting processing. Currently available materials can withstand instantaneous temperatures of approximately 350°C and come in black and silver gray.

每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。
All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.


软连接 Flexible Connectors

适用于保护传动部件，也可用于不便使用其它防护条件的二个或多个部件之间的连接，及风机、火风口等部位。
材料有帆布、硅胶布等。

Suitable for protecting transmission components, as well as for connecting two or more components where other protection methods are inconvenient, and for parts such as fans and fire outlets.

Available materials include canvas, silicone cloth, etc.



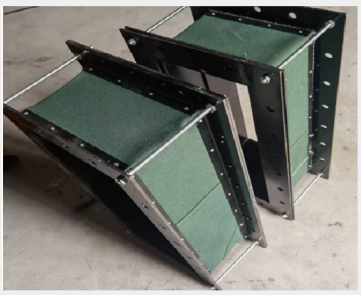





自动伸缩防护罩 Automatic Retractable Guards


用于小空间防护产品。结构及制作相对简单。
可采用普通三防布、耐高温布、不锈钢材料，加轴承、弹簧、收纳盒（也可不用）综合制作而成。

Used for protection in small spaces. Their structure and manufacturing are relatively simple.

They can be comprehensively manufactured using ordinary three-proof fabric, high-temperature resistant fabric or stainless steel materials, combined with bearings, springs and storage boxes (which are optional).

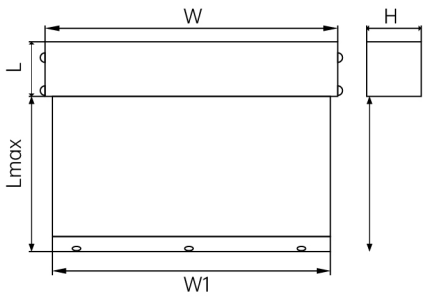

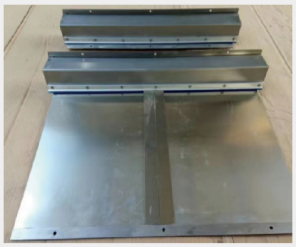

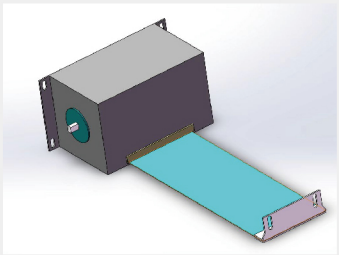

每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。
All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.

钢板防护罩 Steel Plate Guards

1.主要构件：钢板，加强板，滑轮，密封条，减震垫等，根据使用环境还可加防滑板等附件。


2.除图上所标拉伸压缩长度等数据外，还需要导轨上高度等参数及其它实际需求数值。

3.不限于保护冷却液/加工废料等对导轨及丝杠的侵蚀损坏，在其它需要防护部件和美化整体外观方面同样有很好的效果。

1.Main components: Steel plates, reinforcing plates, pulleys, sealing strips, shock pads, etc. Anti-slip plates and other accessories can be added according to the use environment.

2.In addition to the data such as extended and compressed lengths marked on the drawings, parameters such as the height above the guide rail and other actual requirement values are also needed.

3.They are not limited to protecting guide rails and lead screws from erosion and damage caused by coolant and processing waste, but also have excellent effects in protecting other components and beautifying the overall appearance.

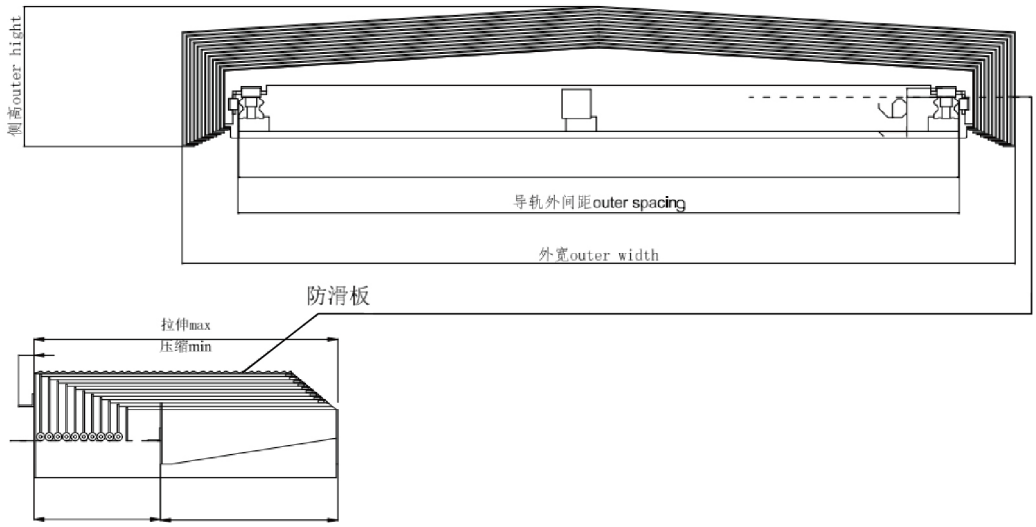

刮屑板 Wiper Plates

适用于清理切削屑及冷却液，耐油，耐磨，选用灵活，制式多样，性价比高。

适用材料：铝合金橡胶，铝合金聚氨酯，不锈钢、丁腈橡胶、PVC。


Suitable for removing cutting chips and coolant. They are oil-resistant, wear-resistant, flexible in selection, diverse in specifications and cost-effective.


Applicable materials: Aluminum alloy rubber, aluminum alloy polyurethane, stainless steel, nitrile rubber, PVC.


GXB型 铝合金制刮屑板参数

规格 / 编号	GXB-16	GXB-18	GXB-20	GXB-23	GXB-25	GXB-28	GXB-30	GXB-32	GXB-33	GXB-35	GXB-40	GXB-45	GSB-50	GXB-55	GXB-60	GXB-70
W	16	18	20	23	25	28	30	32	33	35	40	45	50	55	60	70
C	6	6	6-10				6-15									
D	5-6		5-7													

表格中编号C，D的数据仅供参考，最终以实际定制要求为准。


铝合金制


激光切制品

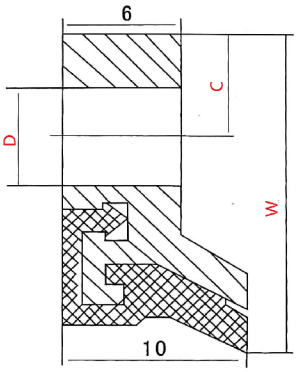


每款产品均可按实际需求设计，也可提供CAD/3D/PDF图纸，依图制作。


All products can be designed according to actual requirements, and we can also provide CAD/3D/PDF drawings for manufacturing based on your drawings.

浪型防水电气配管
Electrical Conduit and Connector Products



■ TYPE：YF-707（Squarelocked）






尺寸规格表　Size Specifications


型　号	规　格	型　式	内径I.D（mm）		外 径O.D（mm）		弯曲半径	包装长度	重　量	才　积
Catalog NO.	Nominal Size	Type	最小 Min	最大 Max	最小 Min	最大 Max	Bending Redius (mm)	Length (M/coil)	Weighht (kg/M)	M'mcnt (cuft)
YF·70703	3/8"	YF·707	12.3	12.8	16.7	17.2	50	50	0.23	0.90
YF·70704	1/2"	YF·707	15.7	16.3	20.2	20.7	65	50	0.28	1.50
YF·70706	3/4"	YF·707	20.7	21.2	25.5	26.1	75	50	0.40	2.20
YF·70710	1"	YF·707	26.0	26.6	31.6	32.2	100	50	0.55	3.60
YF·70712	1 1/4"	YF·707	34.7	35.4	40.8	41.5	125	30	0.70	3.60
YF·70714	1 1/2"	YF·707	40.0	40.6	46.6	47.2	150	30	0.90	4.40
YF·70720	2"	YF·707	51.3	51.9	58.1	58.7	175	20	1.16	4.60
YF·70724	2 1/2"	YF·707	62.9	63.6	72.1	73.0	200	10	1.64	4.10
YF·70730	3"	YF·707	77.9	78.7	87.9	88.9	225	10	2.43	5.80
YF·70740	4"	YF·707	101.6	102.6	113.2	114.3	275	10	2.93	5.30
YF·70750	5"	YF·707	125.0	127.0	137.0	139.5	300	5	4.20	
YF·70760	6"	YF·707	150.0	153.0	162.0	165.0	400	5	5.0	

无PVC浪管（镀锌软管）
PVC-Free Corrugated Conduit (Galvanized Flexible Conduit)



■ TYPE：YF-703（Squarelocked）





尺寸规格表　Size Specifications

型　号	规　格	型　式	内径I.D（mm）		外 径O.D（mm）		弯曲半径	包装长度	重　量	才　积
Catalog NO.	Nominal Size	Type	最小 Min	最大 Max	最小 Min	最大 Max	Bending Redius (mm)	Length (M/coil)	Weighht (kg/M)	M'mcnt (cuft)
YF·70302	1/4"	YF·703	9.7	10.2	13.5	14.0	25	50	0.12	0.73
YF·70303	3/8"	YF·703	12.3	12.8	15.3	15.8	35	50	0.16	0.97
YF·70304	1/2"	YF·703	15.8	16.3	18.7	19.3	40	50	0.21	1.25
YF·70306	3/4"	YF·703	20.8	21.3	23.7	24.2	45	50	0.27	1.67
YF·70310	1"	YF·703	26.4	27.1	29.2	29.8	55	50	0.35	2.69
YF 70312	1 1/4"	YF·703	35.0	35.8	37.7	38.3	60	30	0.46	2.86
YF·70314	1 1/2"	YF·703	40.1	40.6	43.4	44.0	90	30	0.61	3.07
YF·70320	2"	YF·703	51.3	51.9	54.8	55.4	110	20	0.76	3.17
YF·70324	2 1/2"	YF·703	62.9	63.6	66.5	67.2	130	10	0.89	3.18
YF·70330	3"	YF·703	77.9	78.7	81.6	82.4	155	10	1.50	4.29
YF·70340	4"	YF·703	101.6	102.6	105.5	106.5	200	5	2.24	4.57

尼龙软管 Nylon Hose







TYPE：PB
材质：尼龙 NYLON
符合CE法规：EN60529　IP68

尺寸规格表　Size Specifications

型　号	规　格	内径	外 径	弯曲半径	包装（米/卷）
Catalog	Nominal	I.D（mm）	O.D（mm）	Bending Redius	Pacing/Bag
PB-02	AD10.0	6.5	10.0	13	50/100
PB-02-05	AD13.0	10.0	13.0	20	50/100
PB-03	AD15.8	12.3	15.8	35	50/100
PB-03-05	AD18.0	14.0	18.0	40	50/100
PB-04	AD21.2	15.8	21.2	45	50
PB-04-05	AD25.0	20.5	25.0	50	50
PB-06	AD28.5	22.4	28.5	55	50
PB-10	AD34. 5	28.5	34.5	65	50
PB-12	AD42.5	36.0	42.5	90	30
PB-20	AD54. 5	48.0	54.5	100	30
PB-30	AD80.0	66.5	80.0	170	20

聚乙烯软管 Polyethylene Flexible Conduit








TYPE：PE
材质：聚乙烯 Polyethylene
符合CE法规：EN60529　IP68


尺寸规格表　Size Specifications

型　号	规　格	内径	外 径	弯曲半径	包装（米/卷）
Catalog	Nominal	I.D（mm）	O.D（mm）	Bending Redius	Pacing/Bag
PE-02	AD10.0	6.5	10.0	13	50/100
PE-02-05	AD13.0	10.0	13.0	20	50/100
PE-03	AD15.8	12.3	15.8	35	50/100
PE-03-05	AD18.0	14.0	18.0	40	50/100
PE-04	AD21.2	15.8	21.2	45	50
PE-04-05	AD25.0	20.5	25.0	50	50
PE-06	AD28.5	22.4	28.5	55	50
PE-10	AD34. 5	28.5	34.5	65	50
PE-12	AD42.5	36.0	42.5	90	30
PE-20	AD54. 5	48.0	54.5	100	30
PE-30	AD80.0	66.5	80.0	170	20

防爆管 外层编织浪管防水防爆电气配管
Explosion-Proof Conduit
Outer Braided Corrugated Waterproof and Explosion-Proof Electrical Conduit

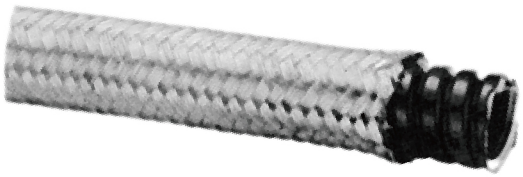

■ TYPE：YF-707（Squarelocked）





尺寸规格表　Size Specifications

型　号	规　格	型　式	内径I.D（mm）		外 径O.D（mm）		弯曲半径	包装长度	重　量	才　积
Catalog NO.	Nominal Size	Type	最小 Min	最大 Max	最小 Min	最大 Max	Bending Redius (mm)	Length (M/coil)	Weighht (kg/M)	M'mcnt (cuft)
YF·70403	3/8"	YF·704	12.3	12.8	18.5	19	70	50	0.380	1.20
YF·70404	1/2"	YF·704	15.7	16.3	21.8	22.3	90	50	0.500	1.52
YF·70406	3/4"	YF·704	20.7	21.2	27.2	27.7	110	50	0.670	2.41
YF·70410	1"	YF·704	26.0	26.6	33.7	34.4	150	50	0.840	3.39
YF·70412	1 1/4"	YF·704	34.7	35.4	42.5	43.2	175	30	1.050	3.88
YF·70414	1 1/2"	YF·704	40.0	40.6	48.4	49.3	200	30	1.320	4.72
YF·70420	2"	YF·704	51.3	51.9	60.4	61.3	230	20	1.830	4.07
YF·70424	2 1/2"	YF·704	62.9	63.6	73.1	74.0	250	10	2.000	4.18
YF·70430	3"	YF·704	77.9	78.7	88.8	89.9	300	10	3.200	5.68
YF·70440	4"	YF·704	101.6	102.6	114.2	115.3	500	5	5.400	6.09


无

不锈钢防护网套
Stainless Steel Guard Net



尺寸规格按需求定制，一般来说，从16-115毫米范围内。


镀锌防水盒直接头（0°）
Galvanized Waterproof Box Straight Connector (0°)

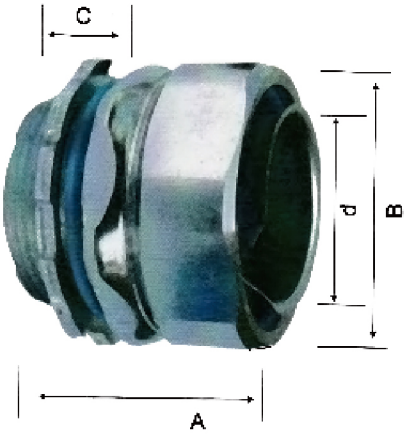

尺寸规格表　Size Specifications

型　号 Catalog NO.	规　格 Nominal Size	尺寸 Dimension（approx）mm				牙制 Thread
		d	A	B	C	
YZB 03B	3/8"	11.5	32	28.5	11.5	G1/2"
YZB 04B	1/2"	14	34.5	33	12	G1/2"
YZB 06B	3/4"	19	39	39	14	G3/4"
YZB 10B	1"	25.0	42.5	42.5	15.5	G1 "
YZB 12B	1 1/4"	32.5	46.5	57.5	17	G1 1/4"
YZB 14B	1 1/2"	38.0	51	62	18.5	G1 1/2"
YZB 20B	2"	48	57	77.5	20.5	G2"
YZB 24B	2 1/2"	60.5	66	95	25	G2 1/2"
YZB 30B	3"	73.5	68	108.5	26	G3"
YZB 40B	4"	96.5	87	140	32	G4"


镀锌防水盒弯接头（90°）
Galvanized Waterproof Box Elbow Connector (90°)

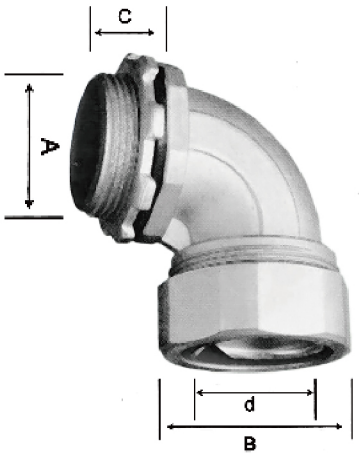

尺寸规格表　Size Specifications

型　号 Catalog NO.	规　格 Nominal Size	尺寸 Dimension（approx）mm				牙制 Thread
		d	A	B	C	
YZL 03B	3/8"	11.5	19	28	11.5	G1/2"
YZL 04B	1/2"	14	21	32.5	11.45	G1/2"
YZL 06B	3/4"	19	27	39	15	G3/4"
YZL 10B	1"	25.0	30	46.5	16	G1 "
YZL 12B	1 1/4"	32.5	35	56.5	17	G1 1/4"
YZL 14B	1 1/2"	38.0	40	64	18	G1 1/2"
YZL 20B	2"	48	46	78	20	G2"
YZL 24B	2 1/2"	61.5	61	97	26	G2 1/2"
YZL 30B	3"	73.5	70	115	28	G3"
YZL 40B	4"	96.5	81	140	32	G4"

YABS型盒接头
YABS Type Box Connector




■ TYPE：YABS
For use with Braided flexible Conduitsystems

尺寸规格表　Size Specifications

型　号 Catalog NO.	规　格 Nominal Size	尺寸 Dimension (approx) mm				牙制 Thread
		d	A	B	C	
YABS-03B	3/8"	13.6	18	29	10	NPT1/2"
YABS-04B	1/2"	13.6	22.3	34	12	NPT1/2"
YABS-06B	3/4"	17.5	28	39	13	NPT3/4"
YABS-10B	1"	24.2	34	49	14	NPT1"
YABS-12B	1 1/4"	33	44	59	16	NPT1 1/4"
YABS-14B	1 1/2"	37.6	50	70	18	NPT1 1/2"
YABS-20B	2"	49	61.5	80	18	NPT2"

YABR型接头　（注：可360°旋转，避免线缆拧结）
YABR Type Connector (Note: 360° rotatable to avoid cable twisting)

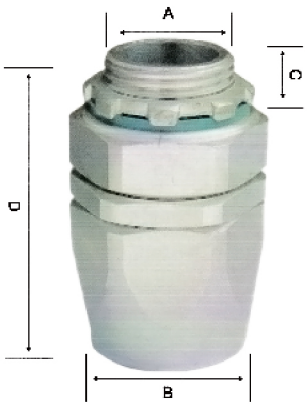

■ Swivel type：YABR


尺寸规格表　Size Specifications

型　号 Catalog NO.	规　格 Nominal Size	尺寸 Dimension (approx) mm					牙制 Thread
		d	A	B	C	D	
YABR-03B	3/8"	10.5	20.3	17.7	11.0	47.0	G1/2"
YABR-04B	1/2"	14.0	20.3	21.2	11.0	52.0	G1/2"
YABR-06B	3/4"	18.5	25.8	26.5	13.0	56.0	G3/4"
YABR-10B	1"	24.0	32.6	32.5	14.0	65.0	G1"
YABR-12B	1 1/4"	32.5	41.5	42.8	16.0	73.0	G1 1/4"
YABR-14B	1 1/2"	37.0	47.0	48.5	16.0	80.0	G1 1/2"
YABR-20B	2"	48.0	59.0	61.0	20.0	89.0	G2"

拧紧接头 Screw-On Connector

材料Material:PA6
温度范围Temperature：-40℃~105℃
防护等级Degree：IP54





尺寸规格表 Size Specifications


型 号 Catalog	适配软管AD Fit to conduit	螺纹规格 Thread Dimension	螺纹长度 GL	孔 径 ΦAI(mm)	外 径 ΦAO(mm)	长度H mm	包装 Packing
YXSF-AD10.0	AD10.0	PG7	15	8.5	12.5	25	50/100
YXSF-AD13.0	AD13.0	PG9	15	11	15.2	25	50/100
YXSF-AD15.8	AD15.8	PG11	15	14	18.6	27	50/100
YXSF-AD15.8	AD18.5	PG13.5	15	16	20.2	27	50/100
YXSF-AD21.2	AD21.2	PG16	15	17	22.5	25	50
YXSF-AD28.5	AD28.5	PG21	14	23	28.3	30	50
YXSF-AD34.5	AD34.5	PG29	14	31	37	35	50
YXSF-AD42.5	AD42.5	PG36	15	40	47	40	30
YXSF-AD54.5	AD54.5	PG48	15	51	59.3	44	30


90°尼龙接头 90° Nylon Connector

材料:尼龙Nylon
温度范围Temperature：-40℃~110℃。
防护等级Degree：IP65










尺寸规格表 Size Specifications

型 号 Type	适配软管 Suitable flexible pipe	螺纹规格 Dimension of thread	L1(mm)	L2(mm)	SW2(mm)	内径(mm) Inside diameter	外径(mm) Outer diameter
LST-K2-PG7	AD10.0	PG7	52	36	22	10	7
LST-K2-PG9	AD13.0	PG9	52	36	22	13	9
LST-K2-PG11	AD15.8	PG11	52	36	24	15.8	11
LST-K2-PG16	AD21.2	PG16	52	38	30	21.2	16
LST-K2-PG21	AD28.5	PG21	67	58	38	28.5	21
LST-K2-PG29	AD34.5	PG29	80	62	46	34.5	29
LST-K2-PG36	AD42.5	PG36	105	82	62	42.5	36
LST-K2-PG48	AD54.5	PG48	126	100	74	52.5	48

快插式软管接头 Push-In Flexible Conduit Connector

材料Material：尼龙PA6
温度范围Temperature：-40℃-105℃
防护等级Degree：IP67






尺寸规格表 Size Specifications

型 号 Catalog	适配软管AD Fit to conduit	螺纹规格 Thread Dimension	螺纹长度 GL	孔 径 ΦAI(mm)	外 径 ΦAO(mm)	长度H mm	包装(米/卷) Packing
YXSQ-AD10.0	AD10.0	M12x1.5	10	7	17	34.5	50/100
YXSQ-AD13.0	AD13.0	M16x1.5	9.5	10	20.2	36	50/100
YXSQ-AD15.8	AD15.8	M18x1.5	9.5	12	23.2	38	50/100
YXSQ-AD18.5	AD18.5	M20x1.5	11	14.5	26.2	40	50/100
YXSQ-AD21.2	AD21.2	M20x1.5	13	15.5	29.7	45	50
YXSQ-AD25.0	AD25.0	M25x1.5	13	20	33	45	50
YXSQ-AD28.5	AD28.5	M25x1.5	13	20.5	37.4	48	50
YXSQ-AD34.5	AD34. 5	M32x1.5	12	26	44	51	50
YXSQ-AD42.5	AD42.5	M40x1.5	14	33	52	54	30
YXSQ-AD54.5	AD54. 5	M50x1.5	14.5	43	64	55	30

软管固定支架 Flexible Conduit Fixing Bracket

材料Material：尼龙PA6
温度范围Temperature：-40℃-105℃






订货编号 Article No.	适配软管规格 Fit to conduit	B mm	H mm	T mm	安装螺丝 mm	A mm	包装数量 Package
YXCC-AD 10(B/G)	AD10.0	30	23	12.5	M4	7.5	100
YXCC-AD 13(B/G)	AD13.0	30	23	12.5	M5	9	100
YXCC-AD 15.8(B/G)	AD15.8	30	23	12.5	M5	9	100
YXCC-AD 18.5(B/G)	AD18.5	35	30	15	M6	9	100
YXCC-AD 21.2(B/G)	AD21.2	35	30	15	M6	11.5	50
YXCC-AD 25(B/G)	AD25.0	40	35	16	M6	11.5	50
YXCC-AD 28.5(B/G)	AD28.5	42	38	16	M6	11.5	50
YXCC-AD 34.5(B/G)	AD34.5	51	43	16	M6	11.5	25
YXCC-AD 42.5(B/G)	AD42.5	61	51	16	M6	11.5	25
YXCC-AD 54.5(B/G)	AD54.5	74	64	19	M6	11.5	20

新质产品(New)

YX-BR型 防水波纹管接头
YX-BR Type Waterproof Corrugated Conduit Connector



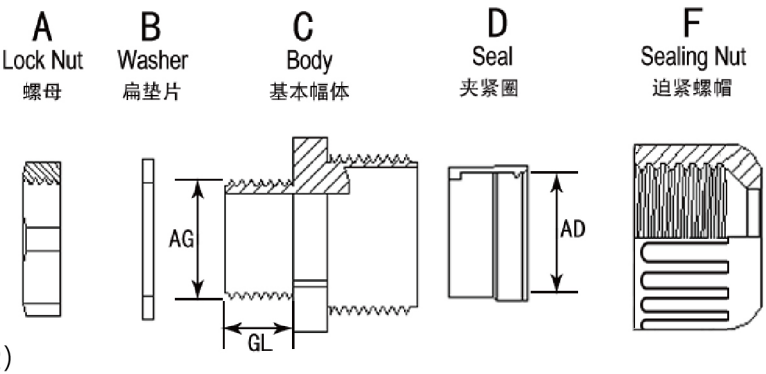

螺纹Thread：公制（Mefric）、德制（PG）
材料Material：尼龙PA66（防火等级U94V-2）
防护等级Degree：IP68
温度范围Temperature：-40°C-100°C
颜色Color：黑色（Black）

公制(Mefric)

型　号 Catalog	公制螺纹 Metric Thread	适配软管AD Fit to conduit	螺纹外径 (mm) Thread 0. D AG (mm)	螺纹长度 (mm) Thread Length GL(mm)	包装 (个) Std. Pkg (Pcs)
YX-BR-M12-10	M12×1.5	AD10	12	9	50
YX-BR-M16-13	M16×1.5	AD13	16	15	50
YX-BR-M16-15.8	M16×1.5	AD15.8	16	15	50
YX-BR-M16-18.5	M16×1.5	AD18.5	16	15	50
YX-BR-M20-21.2	M20×1.5	AD21.2	20	15	50
YX-BR-M25-25	M25×1.5	AD25	25	15	50
YX-BR-M25-28.5	M25×1.5	AD28.5	25	15	50
YX-BR-M32-34.5	M32×1.5	AD34.5	32	15	20
YX-BR-M40-42.5	M40×1.5	AD42.5	40	15	10
YX-BR-M50-54.5	M50×1.5	AD54.5	50	25	10


德制(PG)

型　号 Catalog	德制螺纹 PG Thread	适配软管AD Fit to conduit	螺纹外径 (mm) Thread 0. D AG (mm)	螺纹长度 (mm) Thread Length GL(mm)	包装 (个) Std. Pkg (Pcs)
YX-BR-PG7-10	PG7	AD10	12.5	9	50
YX-BR-PG11-13	PG11	AD13	18.6	10	50
YX-BR-PG11-15.8	PG11	AD15.8	18.6	10	50
YX-BR-PG16-18.5	PG16	AD18.5	22.5	10.8	50
YX-BR-PG16-21.2	PG16	AD21.2	22.5	10.8	50
YX-BR-PG21-25	PG21	AD25	28.3	13	50
YX-BR-PG21-28.5	PG21	AD28.5	28.3	13	50
YX-BR-PG29-34.5	PG29	AD34.5	37	13	20
YX-BR-PG36-42.5	PG36	AD42.5	47	13	10
YX-BR-PG48-54.5	PG48	AD54.5	59.3	16	10

新质产品(New)

快插接头
Quick bellows joint



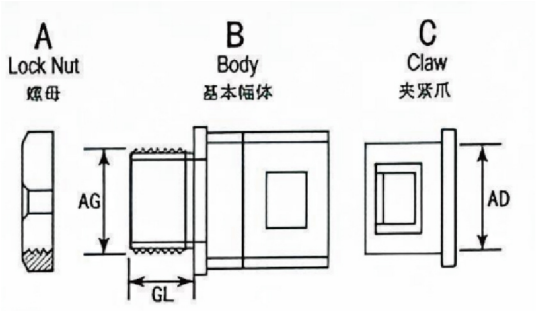

螺纹Thread：公制（Mefric）、德制（PG）
材料Material：尼龙PA66（防火等级U94V-2）
防护等级Degree：IP68
温度范围Temperature：-40°C-100°C
颜色Color：黑色（Black）

公制(Mefric)

型　号 Catalog	公制螺纹 Metric Thread	适配软管AD Fit to conduit	内孔径 (Φ) Inner Apcrturc	螺纹外径 (mm) Thread 0. D AG (mm)	螺纹长度 (mm) Thread Length GL(mm)	包装 (个) Std. Pkg (Pcs)
YX-SR-M10-10	M12×1.5	AD10	6	10	9	50
YX-SR-M10-13	M12×1.5	AD13	7	12	10	50
YX-SR-M16-15.8	M16×1.5	AD15.8	12	16	10	50
YX-SR-M20-18.5	M20×1.5	AD18.5	13	20	12.5	50
YX-SR-M25-21.2	M20×1.5	AD21.2	15	20	13	50
YX-SR-M25-25	M25×1.5	AD25	20	25	13	50
YX-SR-M25-28.5	M25×1.5	AD28.5	20	25	13	20
YX-SR-M32-34.5	M32×1.5	AD34.5	30	32	14	10
YX-SR-M40-42.5	M40×1.5	AD42.5	35	40	15	5
YX-SR-M50-54.5	M50×1.5	AD54.5	42	50	16	5

德制(PG)

型　号 Catalog	德制螺纹 PG Thread	适配软管AD Fit to conduit	内孔径 (Φ) Inner Apcrturc	螺纹外径 (mm) Thread 0. D AG (mm)	螺纹长度 (mm) Thread Length GL(mm)	包装 (个) Std. Pkg (Pcs)
YX-SR-PG7-10	PG7	AD10	7	12.5	8.5	50
YX-SR-PG9-13	PG9	AD13	7	15.2	10	50
YX-SR-PG11-15.8	PG11	AD15.8	13	18.6	12.5	50
YX-SR-PG13.5-18.5	PG13.5	AD18.5	14	20.4	12.5	50
YX-SR-PG16-21.2	PG16	AD21.2	16	22.5	13	50
YX-SR-PG21-25	PG21	AD25	24	28.3	13	20
YX-SR-PG21-28.5	PG21	AD28.5	24	28.3	13	20
YX-SR-PG29-34.5	PG29	AD34.5	30	37	14	20
YX-SR-PG36-42.5	PG36	AD42.5	37	47	15	5
YX-SR-PG48-54.5	PG48	AD54.5	48	59.3	16	5

拖链、排屑机等
更多产品请详询